

CHUCKS


TOPlus Combi deadlength

Chucks with hexagonal clamping geometry

Size	52, 65, 100
Clamping range	3–100 mm

Advantages

- 25 % higher holding power than SPANNTOP
- Unequalled rigidity due to full-surface contact of the clamping segments
- Superior resistance to contamination because of the clamping head geometry
- Absorbs vibration
- Optimal lubrication thanks to lubricating grooves in the clamping head reception
- Minimal inertia loss compared to 3-jaw chucks
- Workpiece clamping without axial movement of the clamping head
- Clamps workpieces with a short collar or shoulder
- Suitable for pick-off without pull-back effect
- Prepared for inside and front end-stop
- Converts to a fully functional »bar chuck« when the end-stop plate is removed

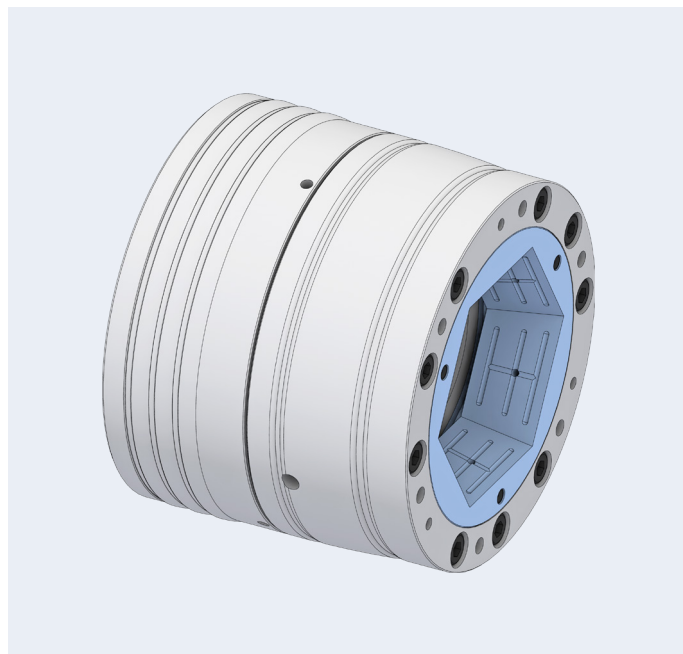

Clamping elements



Clamping head SE