

MANDRELS


MANDO G

Clamping mandrel for gear hobbing and grinding

Size 0, 1, 2, 3, 4
Clamping range 20–120 mm

Advantages

- Standard segmented mandrel with slim interference contour
- Rigid radial clamping with pull-back effect
- Large clamping range and vibration dampening due to vulcanized clamping elements
- Three end-stop levels Integrated flushing channels

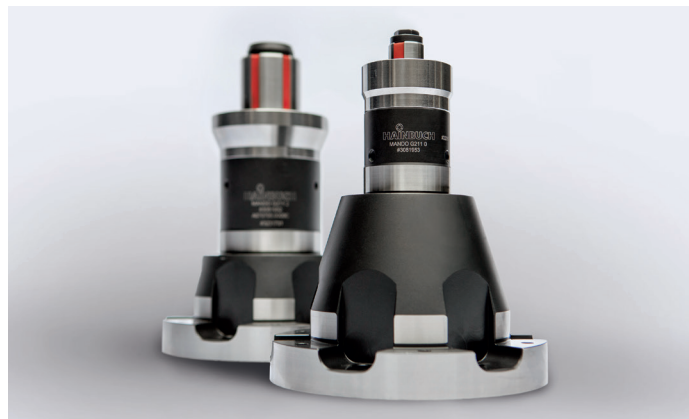

Clamping elements



SB segmented clamping bushing



SAD segmented clamping bushing