

# Operating instructions

[incl. installation manual]

Quick change-over system mandoteX quick change-over adapter





# Contents

1	General				
	1.1	Information about this manual	6		
	1.2	Key to symbols	6		
	1.3	Definition of terms	7		
		1.3.1 Release setting	7		
		1.3.2 Complete clamping reserve	7		
	1.4	Limitation of liability	8		
	1.5	17 5			
	1.6	'			
	1.7	Spare parts and accessories	9		
	1.8	Warranty terms	9		
2	Safe	ety	. 10		
	2.1	Responsibility of the operator	. 10		
	2.2	Personnel requirements			
	2.3	Intended use	. 12		
	2.4	Personal protective equipment	. 14		
	2.5	Particular hazards	. 15		
	2.6	Other safety instructions	. 16		
	2.7	Screws	. 18		
	2.8	Functionality	. 18		
	2.9	Environmental protection	. 19		
3	Tecl	Technical data			
	3.1	General information	. 20		
	3.2	Performance values			
	3.3	Balancing quality	. 21		
	3.4	Speed	. 21		
	3.5	Operating conditions	. 21		
	3.6	Type designation	. 21		
4	Lay	out and function	. 22		
	4.1	Overview and brief description	. 22		
	4.2	Accessories required	. 22		
		4.2.1 Machine adapter	. 22		
		4.2.2 Clamping devices	. 22		
		4.2.3 mandoteX fixing screws	. 22		
5	Use	and limits of use	. 23		
	5.1	Use	. 23		
	5.2	Limits of use	. 23		
6	Transport, packaging, storage				
	6.1	Safety, transport, packaging, storage	. 24		
	6.2	Symbols on the packaging	. 25		
	6.3	Transport inspection	. 25		

# Quick change-over system mandoteX

	6.4	Unpac	king and internal transportation	26		
	6.5					
	6.6	Storag	e	27		
	6.7	Preser	vation	27		
	6.8	Return	to storage	27		
7	Inst	allation.		28		
	7.1	7.1 Installation safety				
	7.2	2 Preliminary remarks				
	7.3	7.3 Screw tightening torques				
	7.4	Preparation of the machine for installation				
	7.5	Installa	ation of the product	32		
		7.5.1	Compatibility check			
		7.5.2	Preparation of the product	32		
		7.5.3	Installation of the product on a machine adapter	33		
8	Use			36		
	8.1	Use-re	lated safety	36		
	8.2		ation of the clamping device			
	8.3	Remov	al of the clamping device	42		
	8.4	Tests.		44		
	8.5	Proced	dure after a collision	45		
9	Acti	vities aft	er end of production	46		
10	Removal					
			emoval			
	10.2 Preparing the machine for removal					
	10.3	Remov	/al of the product	49		
		10.3.1	Removal of the product from a machine adapter	49		
11	Maiı	ntenance	e	50		
		11.1 Maintenance safety				
	11.2	2 Mainte	nance schedule	50		
	11.3 Cleaning					
	11.4 Visual inspection					
		11.5 Lubricating the product54				
		11.6 Use of lubricants59				
12	-					
13	Faults					
	13.1 Procedure with faults					
	13.2 Fault table					
	13.3 Commissioning after a fault has been remedied					
14						
			ct			
	14.2	2 Manufa	acturer certification	59		

# Quick change-over system mandoteX

# **Directory of tables**

Table 1:	Technical data	20
Table 2:	Operating conditions	21
Table 3:	Screw tightening torques, metric control threads	31
Table 4:	Screw tightening torques for aluminum components	31
Table 5:	Maintenance table	51
Table 6:	Selection of lubricants	55
Table 7:	Fault table	58

# 1 General

#### 1.1 Information about this manual

This manual enables you to work safely and efficiently with the product.

This manual is part of the product and must be kept in a location directly beside the product that is accessible to the personnel at all times. The personnel must have read this manual carefully and understood its contents before starting any work. The basic requirement for safe work is compliance with all stipulated safety notices and work-related instructions in this manual.

If the product is passed onto a third party, this manual must accompany it.

Illustrations in this manual are there to facilitate a basic understanding, and may differ from the actual design configuration of the product.



# WARNING

Serious injuries caused by individual products or by inappropriate combinations of them!

 Read and pay attention to all operating instructions for individual products and combinations of them.

# 1.2 Key to symbols

Safety instructions in this manual are designated by symbols. The safety notices are invoked by signal words that express the level of hazard involved.

Always comply with safety notices and exercise caution to avoid accidents, injury to people and damage to materials.

# Safety notices



# **DANGER**

... indicates an immediate and hazardous situation that can lead to death or serious injury if not avoided.



# **WARNING**

... indicates a potentially hazardous situation that can lead to death or serious injury if not avoided.



# CAUTION

... indicates a potentially hazardous situation that can lead to moderate or slight injuries if not avoided.



... indicates a potentially hazardous situation that can lead to damage to materials if not avoided.

# Tips and recommendations



# **INFORMATION**

... highlights useful tips and recommendations as well as information for efficient and problem-free operation.



... refers to other documents relating to personal and general safety.

Warning symbols may appear on the product or its components.

Always pay attention to warning symbols, and exercise caution to avoid accidents, injury to people and damage to materials.

... warns of stored energy [for example involving springs].



... warns of hand injuries.



... draws attention to the fact that the operating instructions of the product must be read.



# 1.3 Definition of terms

# 1.3.1 Release setting

Release setting means that the clamping device is released. If the clamping device is released, this also releases the workpiece.

# 1.3.2 Complete clamping reserve

Complete clamping reserve means that the clamping device is clamped without a workpiece. The complete stroke has been used up, which means that the clamping device is therefore at the limit position for clamping reserve.

# 1.4 Limitation of liability

All details and notices in this manual were compiled with due reference to applicable standards and specifications, stateof-the-art technology and our many years of expertise and experience.

The manufacturer accepts no liability for damage arising from any of the following:

- Non-compliance with this manual
- Unintended use
- Use of untrained personnel
- Autonomous conversion work
- Technical modifications
- Use of non-approved spare parts
- Use of non-approved accessories

Subject to any commitments agreed to in the supplier contract, the General Terms & Conditions of Business and the delivery terms of the manufacturer and all legislative stipulations valid at the time of conclusion of this contract.

# 1.5 Copyright

This manual is protected by copyright, and are only intended for internal use.

The dissemination of this manual to third parties, reproductions in any shape or form - even in part - as well as commercial use and/or communication of their contents are prohibited for anything other than internal use, except with the written consent of the manufacturer.

Infringements oblige the offending party to pay compensation. Without restriction on further claims.

# 1.6 Scope of delivery

The scope of delivery of this product includes:

- Quick change-over adapter with clamping device if installed
- The operating instructions

Additionally needed and included as optional items in the scope of delivery:

- Machine adapter
- clamping device if necessary
- mandoteX fixing screws

# 1.7 Spare parts and accessories



### WARNING

Serious injuries can be caused by incorrect or defective spare parts!

Always use genuine spare parts made by the original manufacturer.



# **WARNING**

Serious injuries can be caused by incorrect or defective machine adapter!

Always use genuine machine adapters made by the original manufacturer.

# **NOTE**

Damage, malfunctions or total failure of the product or the machine tool caused by an incorrect or defective spare parts!

Always use genuine spare parts made by the original manufacturer.

# **NOTE**

Damage, malfunctions or total failure of the product or the machine tool caused by an incorrect or defective machine adapter!

Always use genuine machine adapters made by the original manufacturer.

Spare parts and accessories can be sourced from contract dealers or directly from the manufacturer [see »Contact« chapter].

Without exception, wearing parts and components in contact with the workpiece are not covered by warranty.

#### 1.8 Warranty terms

The warranty terms are included in the manufacturer's General Terms & Conditions of Business.

# 2 Safety

This section provides an overview of all the important safety aspects for optimum protection of personnel, and for safe and problem-free operation.

# 2.1 Responsibility of the operator

The product is used in the industrial sector. The operator of the product is therefore governed by the provisions of Health & Safety at Work legislation.

As well as the safety notices in this manual, the area of use of the product must also comply with locally applicable safety, accident prevention and environmental protection specifications as well as those in the manual for the machine tool.

No modifications must be made to the product. The operator is wholly and solely responsible for any resultant personal injury and/or damage to materials.



# **DANGER**

Serious injuries caused by parts being ejected centrifugally due to a drop in actuating force / supply pressure!

- On the machine, ensure that the actuating force / the supply pressure do not drop while the product is in use
- If no precautions have been taken on the machine to maintain the actuating force / the supply pressure, it is prohibited to use this product on the machine.
- Pay attention to the operating instructions for the machine tool.

If the machine adapter and / or the clamping device is poweractuated, pay particular attention to ensuring that the limit stop calls from the machine tool are set to suit the quick change-over unit installed on it.



#### **DANGER**

Serious injuries caused by parts being ejected centrifugally after defective setting of the machine!

- Set up the end-stop requests by the machine tool on the product involved.
- On a regular basis, check the end-stop requests of the machine tool [see »Maintenance schedule« chapter].
- If the limit stops are not reached, the product must not be used any more.



### WARNING

Serious injuries caused by incorrect setting of the limit switches on the machine!

- On quick change-over units in which no idle stroke is taken into account, when replacing the limit switches on the machine, they must always be adapted to match the stroke of the quick change-over unit installed.
- On quick change-over units in which idle stroke is taken into account, the limit switches on the machine must always be matched to the stroke of the quick change-over unit.

# 2.2 Personnel requirements



### WARNING

Serious injuries caused by incorrect handling of the product by insufficiently skilled or trained personnel!

All activities must be performed by skilled staff from the relevant specialist field.



# **WARNING**

Serious injuries caused by unauthorized presence of unauthorized personnel in the working area!

- Keep unauthorized people away from the working area.
- If in doubt, speak to people and direct them to leave the working area.
- Interrupt work until unauthorized people have left the working area.

## NOTE

Serious damage to materials caused by incorrect handling of the product by insufficiently skilled or trained personnel!

All activities must be performed by skilled staff from the relevant specialist field.

This manual name the following skills sets required for various different areas of activity:

# Skilled specialist

Skilled specialists, due to their professional training, knowledge and experience and awareness of applicable provisions, are capable of carrying out the work entrusted to them and independently to identify and avoid potential hazards.

# Hydraulics specialist

Hydraulics specialists are trained in the specific task profile for which they are employed, and are familiar with the relevant standards and legislative provisions.

Due to their vocational training and experience, hydraulics specialists can work on hydraulic systems and can independently identify and avoid potential hazards.

# **Pneumatics specialist**

Pneumatics specialists are trained in the specific task profile for which they are employed, and are familiar with the relevant standards and legislative provisions.

Due to their vocational training and experience, pneumatics specialists can work on pneumatic systems and can independently identify and avoid potential hazards.

### **Electricians**

Electricians are trained in the specific task profile for which they are employed, and are familiar with the relevant standards and legislative provisions.

Due to their vocational training and experience, electricians can work on electrical systems and can independently identify and avoid potential hazards.

#### **Trainees**

Trainees can only work on the machine under the supervision and direction of staff skilled in the relevant specialist field.

The only people admitted as personnel are those who can reasonably be expected to carry out their work to a reliable standard. People whose response capabilities are impaired, for example by drugs, alcohol or medication, are prohibited.

For the selection of personnel, pay attention to the stipulations applicable at the place of work governing age and specific vocational requirements.

### 2.3 Intended use

The product is only intended for installation in a CE-compliant machine tool with a separating set of guards.

The product is only intended for the type of use described in this manual [see »Use« chapter]. Furthermore, an extended form of use can be agreed contractually between manufacturer and operator.

Only skilled staff from the appropriate specialist fields may install, operate, maintain and clean the product [see »Personnel requirements « chapter].

Never exceed the technical values stipulated for the product [see »General information« and »Operating conditions« chapters].

# Quick change-over system mandoteX Safety

Furthermore, never exceed the limits for use of the product [see »Limits of use « chapter].

Maintain the product at regular intervals [see »Maintenance schedule« chapter].

When used for its intended purpose, the operational safety of the product is assured, subject to compliance with relevant safety stipulations, to the full extent foreseeable.

Intended use also includes compliance with all stipulations in this manual.

Any form of use beyond the scope of intended use, or other forms of use of the product, is considered as misuse, and can lead to dangerous situations.



# **DANGER**

# Serious injuries caused by misuse of the product!

- Only in a CE-compliant machine tool with a separating set of guards.
- Only use for the type of use indicated [see »Use« chapter].
- Only skilled staff from the appropriate specialist fields may use the product [see »Personnel requirements« chapter].
- Never exceed the technical data indicated on the product [see »General information « and »Operating conditions« chapters].
- Never exceed the limits for use of the product [see »Limits of use « chapter].
- Maintain the product at regular intervals [see »Maintenance schedule« chapter].
- Only use with approved attachments.

# NOTE

# Damage to materials caused by incorrect use of the product!

- Only in a CE-compliant machine tool with a separating set of guards.
- Only use for the type of use indicated [see »Use« chapter].
- Only skilled staff from the appropriate specialist fields may use the product [see »Personnel requirements« chapter].
- Never exceed the technical data indicated on the product [see »General information « and »Operating conditions « chapters].
- Never exceed the limits for use of the product [see »Limits of use « chapter].
- Maintain the product at regular intervals [see »Maintenance schedule« chapter].
- Only use with approved attachments.

Claims of all kinds will be rejected that are due to unintended use.

Here are some examples of unintended use of the product

- If people fail to observe the safety stipulations when working on the product, by failing to use additional protective equipment.
- if the product is used on machines, machine adapters or clamping devices for which it is not intended.

# 2.4 Personal protective equipment

During work, it is essential to wear personal protective equipment to minimize the health hazards.

Always wear the required personal protective equipment when working on any given job.

Always pay attention to any notices about personal protective equipment displayed in the working area.

#### Always wear

When working, always wear the following items:



# Workplace clothing

Workplace clothing should be close-fitting, with low tear-resistance, narrow cuffs and no protruding parts. It serves primarily to protect the wearer from coming into contact with moving machine parts. Do not wear rings, chains or other jewelry.

# Quick change-over system mandoteX Safety



# Safety footwear

To protect the wearer from any heavy items that may fall, and from losing their footing on slippery ground.




# **Protective goggles**

To protect the eyes from projectile parts and liquid splashes.



#### Hair net

To protect long hair from getting snagged in rotating parts on the machine tool.



When carrying out certain work, additional personal protective equipment is required. Separate reference is made to this in the individual chapters of this manual. The following section explains these additional items of personal protective equipment:



# **Protective gloves**

To protect the hands from friction, chafing, stabbing or deeper injuries and from contact with hot surfaces.



# Hard hat

To protect against falling and projectile parts and materials.

### 2.5 Particular hazards

The following section names residual risks resulting from the installation of the product in a machine tool. In all cases, the residual risks detected during a risk assessment of the machine tool need to be named by the operator.

Pay attention to the safety instructions named here, as well as the warning notices in other chapters of these operating instructions to reduce the risk of health hazards and to prevent dangerous situations.

# **Moving parts**



#### WARNING

# Serious injuries caused by touching rotating and/or moving parts!

- Do not open guards while the system is operating.
- During operation, do not reach for rotating and/or moving parts.
- Pay attention to the gap dimensions of moving parts.
- Before opening the guards, ensure that none of the parts are moving any more.

# Missing clamping device



# **WARNING**

# Serious crushing injuries without a clamping device installed caused by the stroke of the product!

- Never install and actuate a quick change-over unit on the machine adapter without first installing a clamping device.
- Prevent accidental initiation of the clamping process [for example due to an installation error with the power supply or a programming error].

# Sharp-edged parts



### **WARNING**

# Serious cut injuries caused by sharp-edged parts and burrs!

- All installation of individual parts must be performed by skilled staff from the relevant specialist field.
- Also wear the following items of personal protective equipment, in addition to the basic equipment:



# 2.6 Other safety instructions



#### **WARNING**

# Serious head injuries caused by bending into the working area of the machine!

- Only ever bend into the working area of the machine if there are no cutting tools or sharp objects in it, or if these are covered.
- Never move body parts under parts in the working area of the machine with the potential to drop down.



### WARNING

Serious injuries caused by snagging body parts on the rotating machine spindle!

- Never reach into the product while the machine spindle is still rotating.
- Before working on the product, ensure that the machine spindle is unable to start up.



# **WARNING**

Serious injuries caused by reaching into slots and bores!

Never reach into slots or bores.



#### WARNING

Serious injuries caused by the use of damaged products or by their components and accessories!

- Check products or their components and accessories on a regular basis for visible signs of damage [see »Inspections« and »Cleaning« chapters].
- Use of damaged products, their damaged components and/or their damaged accessories is prohibited.
- Report damage to the operator immediately.
- Damaged components / accessories must be replaced with genuine spare parts / accessories made by the manufacturer.



# **CAUTION**

Cut injuries caused by sharp edges and burrs resulting from wear and/or repeated rework!

- Remove sharp edges and burrs.
- If necessary, replace worn components with genuine parts made by the manufacturer.

#### NOTE

Damage to materials caused by untightening the wrong screws!

Do not open the screws secured with sealing lacquer.

#### 2.7 Screws



#### WARNING

Serious injuries caused by radially installed screws being ejected centrifugally if installed incorrectly / poor handling!

- Do not open the screws secured with sealing lacquer.
- Screws and threaded pins fitted radially to the product that were bonded with adhesive need to be secured again using a standard, mediumstrength screw adhesive and tightened to the specified tightening torque [see nomenclature or the »Screw tightening torques« chapter]. Before reinstallation, clean and degrease the screw and internal thread.
- Radially mounted screws and threaded pins that were not bonded with sealing lacquer or an adhesive need to tightened back down to the specified tightening torque [see nomenclature or the »Screw tightening torques« chapter].
- If in doubt, contact the manufacturer immediately to determine how best to proceed.

# 2.8 Functionality



# WARNING

Serious injuries caused by severe contamination of the product!

 Always comply with the cleaning instructions and intervals [see »Cleaning« chapter].

# 2.9 Environmental protection

### NOTE

Substantial damage to the environment can result from non-compliant handling or incorrect disposal of environmentally hazardous substances!

- If environmentally hazardous substances enter the environment accidentally, take immediate remedial action.
- If in doubt, notify the relevant municipal authorities about the incident.

The following environmentally hazardous substances are used:

# Lubricants, auxiliary materials and operating fluids

Lubricants such as grease and oil can contain toxic substances. These must not enter the environment.

Dispose of environmentally hazardous substances properly [see »Disposal« chapter].

# 3 Technical data

# ñ

#### **INFORMATION**

The technical data for the clamping device are itemized in the operating instructions for the clamping device [see operating instructions for the clamping device].



In addition to these operating instructions, also read and follow the operating instructions for the relevant clamping device.

#### 3.1 General information

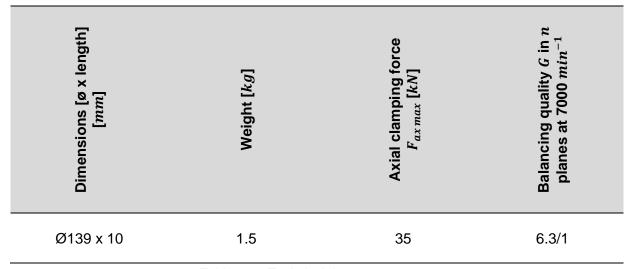


Table 1: Technical data

#### 3.2 Performance values

#### NOTE

Material damage to the products use and/or to the machine tool caused by exceeding the maximum performance values!

- Do not exceed the maximum performance values [see »General information « chapter].
- On all products used, do not exceed the lowest of the maximum performance values.
- Only use product in machine tools with the same performance values.

# ที

#### **INFORMATION**

Details of maximum performance values can be found on each product.

If, due to abrasive wear, those performance values are no long legible, refer to the operating instructions.

# Quick change-over system mandoteX **Technical data**

The achievable actuation forces may vary as a result of the maintenance status [lubrication status and level of contamination] of the product [see »Maintenance schedule« chapter].

# 3.3 Balancing quality

The product is balanced before leaving the factory [balancing quality - see »General information « chapter].



# **DANGER**

Serious injuries caused by parts being ejected centrifugally if products are not balanced correctly!

Never remove balancing screws and weights attached to the product.

# NOTE

Material damage caused by machining with incorrectly balanced products!

Never remove balancing screws and weights attached to the product.

# 3.4 Speed

The product is authorized for rotational operation.



# **DANGER**

Serious injuries caused by parts being ejected centrifugally due to a non-compliant combination of several products!

From all of the maximum speeds indicated for the combined products, always remain at the lowest of those maximum speeds.

# 3.5 Operating conditions

Indication	Value	Unit
Ambient temperature range	15 - 65	°C
Humidity	≤ 80	%

Table 2: Operating conditions


# 3.6 Type designation

The type designation is on the product and it includes the following indications:

- Manufacturer
- Product designation
- ID number [marked with a # symbol]
- Build year
- Maximum actuating force  $F_{ax \ max} \ [kN]$

# 4 Layout and function

# 4.1 Overview and brief description

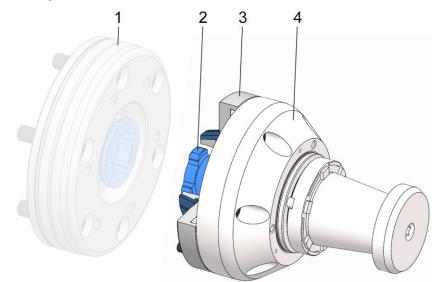

- 1 Machine adapter
- 2 Bayonet coupling
- 3 Quick change-over adapter
- 4 Clamping device

The quick change-over system is used for fast conversion of the machine tool to different clamping devices / supports.

For this, there is one support that always remains on the machine spindle, the machine adapter.

The clamping device is equipped with an appropriate counter-support, the quick change-over adapter.

Together, the clamping device and the quick change-over adapter form the quick change-over unit.

The machine adapter is secured to the machine spindle.

The quick change-over unit is bolted to the machine adapter.

The actuation mechanism of the power-actuated clamping device is connected to the machine adapter by the bayonet coupling on the quick change-over adapter.

# 4.2 Accessories required

# 4.2.1 Machine adapter

The machine adapter is used to adapt the quick change-over unit to the machine tool.

# 4.2.2 Clamping devices

The clamping device is secured to the product to adapt it to the machine tool.

# 4.2.3 mandoteX fixing screws

mandoteX fixing screws are needed for installing the clamping device to the quick change-over unit and for installing the quick change-over unit to the machine adapter.

# 5 Use and limits of use

# 5.1 Use

The product serves only to hold power-actuated clamping devices with a manufacturer declaration.

The product can only be used in combination with a suitable machine adapter from HAINBUCH.

As well as for its general field of application, this product was designed and developed for use, when necessary, in a specific and documented application [see clamping situation drawing or order confirmation].

Any other fields of application require the explicit approval of the manufacturer.

# 5.2 Limits of use

The limits of use for the installed product apply [see operating instructions for the installed product].

# 6 Transport, packaging, storage

6.1 Safety, transport, packaging, storage



# **WARNING**

High level of physical strain due to the weight of the product or of its components if not transported properly!

From a weight of 10 kg, use appropriate transport equipment, lifting gear and lifting tackle.



# **WARNING**

Serious crushing injuries and breakages caused by falling parts if transported incorrectly!

- Ensure that the product cannot roll away or fall.
- Place on a non-slip surface.
- When using lifting gear, use appropriate loadbearing equipment and lifting tackle.



#### **WARNING**

Serious injuries caused by transporting off-center equipment!

- Pay attention to marks on the packaging items.
- Attach the crane hook directly above the center of gravity.
- Raise carefully and correct the lifting points if necessary.



#### WARNING

Serious injuries caused by incorrect transport with lifting gear!

- Never raise loads above people.
- Never step under suspended loads.
- Pay attention to information about the intended lifting points. Ensure that the lifting gear is mounted on a secure base.
- Only use authorized and undamaged lifting gear, load-bearing equipment and lifting tackle.
- Never exceed the maximum load-bearing capacity of lifting gear, load-bearing equipment and lifting tackle.

# NOTE

Damage to materials caused by falling parts if transported incorrectly!

- Ensure that the product cannot roll away or fall.
- Place on a non-slip surface.
- When using lifting gear, use appropriate loadbearing equipment and lifting tackle.

# 6.2 Symbols on the packaging



#### **Fragile**

Designates packaging items with fragile or breakable contents.

Handle the packaging item with care. Do not drop it and protect it against collision impacts.



# Keep it dry

Keep packaging items dry and protect them from the ingress of water.



# **Position designation**

Points to the correct upright position of the packaging item.

# 6.3 Transport inspection

Check the delivery on receipt immediately to ensure it is complete and has not been damaged in transit.

Proceed as follows if you find any externally visible signs of damage while in transit:

- Refuse to accept the delivery, or only subject to later approval
- Make a note of the extent of damage on the transportation documents or on the delivery note of the transportation company
- Initiate a complaint



# **INFORMATION**

Raise a complaint for every defect as soon as it is discovered. Compensation claims can only be enforced during the applicable complaint periods.

# 6.4 Unpacking and internal transportation

The total weight of the product depends on its size.

Depending on the weight involved, it may be necessary to use lifting gear to lift the product or its components out of the packaging safely, to transport them and to position and install them in the machine tool or on the machine table.

- 1. The product is packaged in a stable position, and it has threads / bores for transportation.
- Lifting tackle can be installed in these transportation threads / bores. To lift the product out of its packaging, the front-end functional threads can if necessary be used to attach lifting tackle to upright packaged products.
- 3. Attach load-bearing equipment to the lifting tackle.
- 4. Subject to weight, use lifting gear to lift the product out of its packaging safely, and place it down on a stable, flat surface.
- 5. Secure the product to prevent it from rolling away.
- 6. When transporting on a trolley or car, ensure that the product is securely mounted on a non-slip surface before starting to move it.

# 6.5 Packaging

The individual packaging items are packaged in an appropriate manner for the type of transportation involved. Always use environmentally compatible materials for packaging purposes.

Packaging should protect individual components from damage in transit, corrosion and other forms of damage, up until installation. For this reason, do not destroy the packaging, and do not remove it until shortly before installation.



### **INFORMATION**

The packaging units are packaged, wrapped in airtight film and placed in cardboard boxes. On the individual weights of each of the sizes [see »General information« chapter].

Dispose of packaging material in accordance with applicable legislative provisions and local regulations.

# NOTE

# Damage to the environment caused by improper disposal of packaging materials!

- Dispose of packaging materials in an environmentally responsible manner.
- Pay attention to local disposal regulations and, if necessary, appoint a specialist waste disposal company with this work.

# **Quick change-over system mandoteX Transport, packaging, storage**

# 6.6 Storage



#### **INFORMATION**

The packaged items may display information relating to storage and readmission to storage that extend beyond the scope of these requirements. Pay attention to these notices.

Store packaged items under the following conditions:

- Safe for storage.
- Do not store outdoors.
- Store in a dry, dust-free place.
- Avoid exposure to aggressive media.
- Protect against direct sunlight.
- Avoid mechanical vibration.
- Storage temperature: 15 to 35°C.
- Relative humidity: Maximum 60%.
- In the event of storage for more than 3 months:
  - On a regular basis, check the general condition of all parts and packaging.
  - If necessary, refresh the preservation or replace it.

#### 6.7 Preservation

- Clean and lubricate the product [see »Cleaning« and »Lubricating the product« chapters].
- 2. Apply a light coating of preserving oil to the inner and outer faces of the product. Wipe away surplus preserving oil with a sort, lint-free, tear-resistant cloth.
- 3. Pack product air-tight in foil.
- Return product to storage [see »Return to storage« chapter].

#### 6.8 Return to storage

Return product to storage under the following conditions:

- Preserve the product [see »Preservation « chapter].
- The product must be stored in a safe condition. Use an appropriate container for the product, on a non-slip surface, or fit the floor of the shelving unit with an all-round safety border.
- 3. For storage conditions, see the »Storage« chapter.

# Installation

# 7.1 Installation safety



# **WARNING**

Serious injuries caused by unskilled staff during installation / removal!

Installation and removal must be performed by skilled staff from the relevant specialist field.



# **WARNING**

Serious injuries can be caused if the machine tool starts up accidentally!

- Set the machine tool into set-up mode.
- Remove all tools, auxiliary equipment and items of test equipment immediately from the working area of the machine.
- Remove all lifting gear from the product and from the working area of the machine.



#### WARNING

Serious injuries caused by the escape of media under high pressure!

- Shut down media delivery during installation and removal.
- Relieve any pressure trapped in the system.
- Shut down the system.



# **WARNING**

Serious crushing injuries and breakages caused by falling parts during incorrect installation or removal!

- Ensure that the product cannot roll away or fall.
- If necessary, use an appropriate mounting aid for installation or removal on a vertically suspended machine spindle.



# **WARNING**

Serious crushing injuries caused by improper machine movement during installation or removal!

- Machine movements are only permitted in set-up mode during installation and removal.
- Never reach into a gap.
- Pay attention to the gap dimensions of moving parts.



### **WARNING**

Serious head injuries caused by bending into the working area of the machine!

- Only ever bend into the working area of the machine if there are no cutting tools or sharp objects in it, or if these are covered.
- Never move body parts under parts in the working area of the machine with the potential to drop down.
- Depending on weight, use an appropriate mounting aid for installation or installing on a vertically suspended machine spindle.



### **WARNING**

High level of physical strain due to the weight of the product or of its components if not transported properly!

■ From a weight of 10 kg, use appropriate transport equipment, lifting gear and lifting tackle.

# NOTE

Damage to materials caused by lifting gear left in the product!

- Always remove lifting gear immediately after installing the product.
- NOTE [only for aluminum components]

  Damage to materials can be caused by incorrect screw tightening torques on aluminum components!
  - Pay attention to the reduced screw tightening torques for aluminum components [see »Screw tightening torques « chapter].

29

# 7.2 Preliminary remarks

- In accordance with their thread size and strength class, screws must be tightened crosswise to the specified tightening torque [see »Screw tightening torques « chapter]. When tightening the screws, do so evenly to prevent any distortion under load.
- To avoid precision errors, clean all screw-fitting points and mating surfaces [Notes on cleaning, see »Cleaning« chapter]. Factory wetting of flat surfaces and, where necessary of clamping elements, only serves as a corrosion inhibitor. This is not functionally related lubrication.
- Only apply lubricant to the mechanical mating surfaces.
   Pay attention to notes about lubricants [see »Use of lubricants « chapter].
- Avoid too much lubricant on the locating face because this can cause face run-out errors.
- Apply grease to the sealing elements [for example Orings, rectangular rings] and sealing surfaces. Pay attention to notes about greases [see »Use of lubricants« chapter].
- Do not damage the functional surfaces [flat, mating, tapered and sealing surfaces].

# 7.3 Screw tightening torques

The tables show the specified values.

Knowledge of the applicable guidelines and design criteria is essential.

#### NOTE

Damage to materials caused by defective screw tightening torques!

■ To secure the product to the machine, pay attention to the values specified by HAINBUCH and by the machine manufacturer for screw tightening torques. If the machine manufacturer stipulates different values, you must consult HAINBUCH.

#### Metric control threads

The following table contains the guide values in Nm for screw tightening torques for achieving the highest permitted preload for metric control threads.

	Total friction	coefficient $\mu_{ae}$	$s_{\rm s} = 0.1$	2
--	----------------	------------------------	-------------------	---

Thread designa-	Tightening torque at screw quality [Nm]	
tion	10.9	12.9
M4	4	5
M5	7	9
M6	12	15
M8	25	38
M10	50	70
M12	100	130
M16	220	300
M20	400	550
M24	600	800

Table 3: Screw tightening torques, metric control threads

# **Aluminum components**

The following table contains the reduced screw tightening torques for securing aluminum components.


Thread designa- tion	Tightening torque [Nm]	Minimum screw depth [mm]
M6	10	12
M8	23	16
M10	46	20

Table 4: Screw tightening torques for aluminum components

# 7.4 Preparation of the machine for installation

- Set the machine into set-up mode.
- Reduce the operating pressure to a minimum.
- 3. Remove cutting tools and/or sharp objects from the working area of the machine, or cover them.

# 7.5 Installation of the product

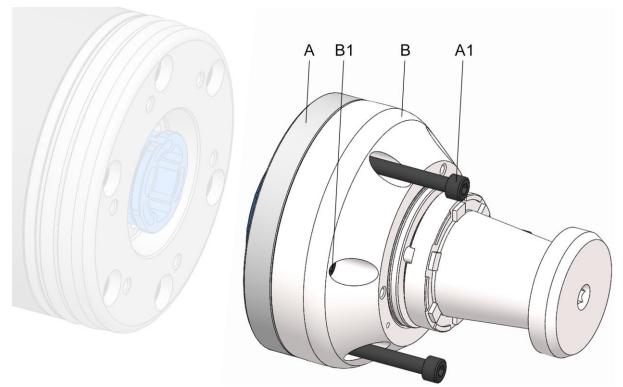

- A Quick change-over unit
- A1 Fixing screws on the quick change-over unit
- B Clamping device
- B1 Fixing screws clamping device

Before installing the product, a machine adapter must be installed on the machine spindle.

1. As described in the »Preparation of the machine for installation « chapter, prepare for the following steps.

# 7.5.1 Compatibility check

Check the compatibility of the product and the connection point of the machine adapter.

For this, check that the connection point and the product share the same adaptation geometry. Also check if the actuating element / coupling element is suitable.

# 7.5.2 Preparation of the product

The product is supplied in assembled condition.

The following preparatory steps are needed to install the product.

 Install the clamping device on the product [see »Installation of the clamping device « chapter].

# 7.5.3 Installation of the product on a machine adapter

# **INFORMATION**

Installation / removal of the product is described in the operating instructions for the machine adapter.


(F

In addition to these operating instructions, you should also read and follow the operating instructions for the associated machine adapter.

1. Install the product.

# **INFORMATION**


The alignment process is performed after initial installation of the quick change-over unit on the machine adapter, after repeated initial installation after cleaning the product and also when required.

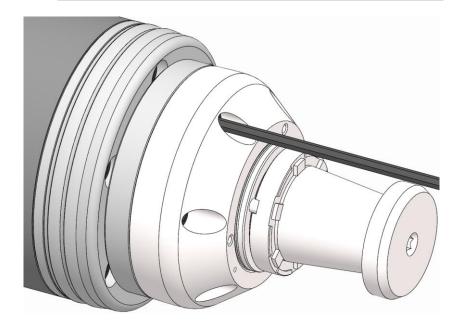


# **INFORMATION**

When removing a MANDO T211 / T212 or a MAXXOS T211, the fixing screws on the quick change-over unit are the screws without any marking.


2. Unfasten the fixing screws on the quick change-over unit and move it closer gently.

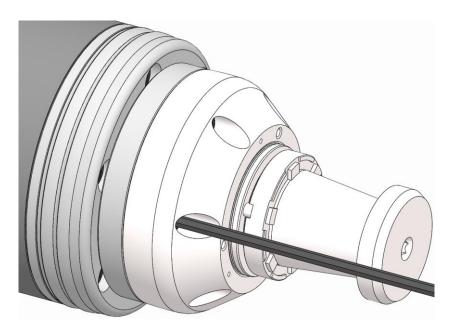

- 3. Unfasten the clamping device fixing screws and tighten them gently.
- 4. Check the face run-out of the clamping device on a suitable test surface [ideally ≤ 0.005 mm] and, if necessary, correct carefully with a plastic hammer.

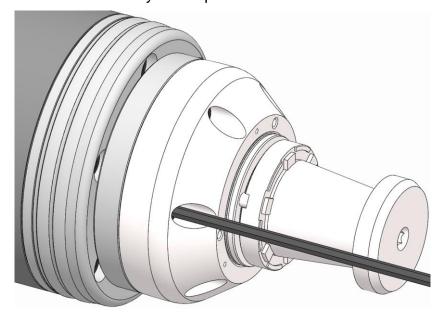

5. Tighten the fixing screws on the clamping device to the specified tightening torque [see »Screw tightening torques « chapter].

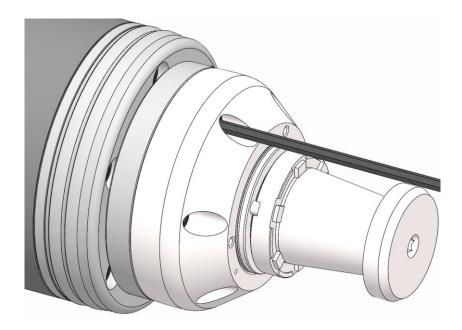

- 6. Screw in the fixing screws on the quick change-over unit and tighten to the specified tightening torque [see »Screw tightening torques « chapter].
- 7. Check the face run-out of the clamping device on a suitable test surface [ideally ≤ 0.005 mm].

Whenever the face run-out is greater than the maximum permitted value:

- 8. Remove the quick change-over unit [see »Removal of the product from a machine adapter « chapter].
- Remove the clamping device from the product [see »Removal of clamping device chapter].
- 10. Clean the locating surface and mating surfaces of the flange and the clamping device.
- 11. When a burr or slight damage occurs, rub down the locating surfaces of the clamping device and flange with an oil stone.
- 12. Install the clamping device again [see »Installation of the clamping device « chapter].
- 13. Install the quick change-over unit again [see »Installation of the product on a machine adapter« chapter].
- 14. Repeat the alignment process.
- 15. Repeat the face run-out test.

# 8 Use

#### 8.1 Use-related safety



# **WARNING**

Serious injuries can be caused if the machine tool starts up accidentally!

 Prior to commissioning, close all safety doors or hoods on the machine tool.



### **WARNING**

Serious injuries caused by tools and items of test equipment being ejected centrifugally!

Prior to commissioning, ensure that all tools and items of test equipment are removed from the working area of the machine.



#### WARNING

Serious injuries caused by unskilled personnel during the installation / removal of the clamping device!

 Installation / removal of the clamping device must be performed by skilled specialists from the relevant field.



### **WARNING**

High level of physical strain due to the weight of the product or of its components if not transported properly!

■ From a weight of 10 kg, use appropriate transport equipment, lifting gear and lifting tackle.

### NOTE

Damage to materials caused by lifting gear left in the product!

 Always remove lifting gear immediately after installation / removal of the clamping device.

# NOTE

Damage to components caused by cooling lubricants with sufficient levels of corrosion inhibitor!

- The components made of steel materials must be protected before the usual oxidation process.
- Only ever use cooling lubricants with sufficient levels of corrosion inhibitor.

#### NOTE

#### Damage to materials caused by contaminated / unprocessed cooling lubricants!


For the product to function properly, in particular for internal flushing with cooling lubricants and/or when using tools with internal flushing, ensure that the cooling lubricant is cleaned / processed, and that it contains no particles measuring >100 microns [filtered with a mesh width of 100 microns].

#### NOTE

#### Damage to seals caused by using the wrong coolant lubricants!

- To clean the product, never use a cooling lubricant that attacks and damages the sealing elements installed. Those installed sealing elements can be made of NBR, Viton and PUR materials.
- Never use cooling lubricants that contain ester or a polar solvent.

## 8.2 Installation of the clamping device

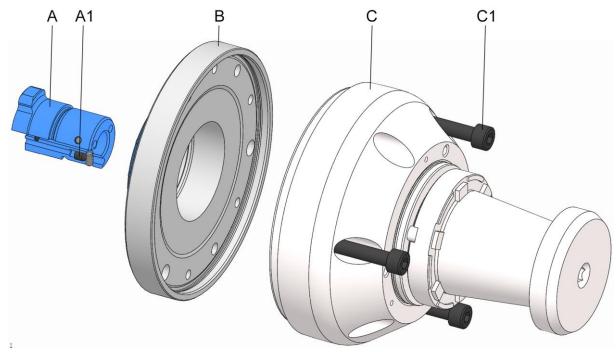

- **Bayonet** coupling Α
- A1 Bayonet coupling clamping screws
- Flange В
- С Clamping device
- C1 Fixing screws clamping device




In addition to these operating instructions, also read and follow the operating instructions for the relevant clamping device.


## ñ

#### **INFORMATION**

The clamping device fixing screws included in the scope of delivery of the clamping device are not required. To install the clamping device, use the mandoteX fixing screws that are also needed.

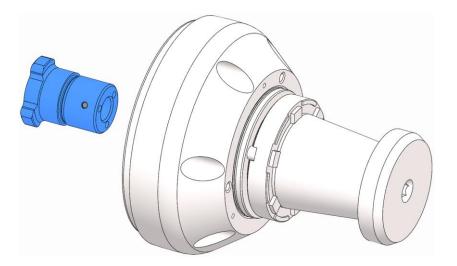

1. Screw the bayonet coupling firmly home in the clamping device.



#### INFORMATION


The set-up dimension describes the axial spacing dimension between the flat surface of the bayonet coupling and the flat surface of the clamping device adapter.

# ñ


#### **INFORMATION**

The tolerance of the set-up dimension is  $+0.25 \ mm$  of the nominal dimension.


2. Unscrew the bayonet coupling until the set-up dimension of 14.1 mm is reached.

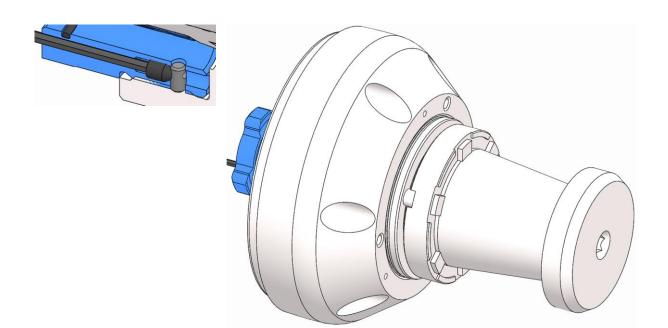



3. Gently tighten one of the clamping screws on the bayonet coupling [tightening torque approximately 3 Nm].

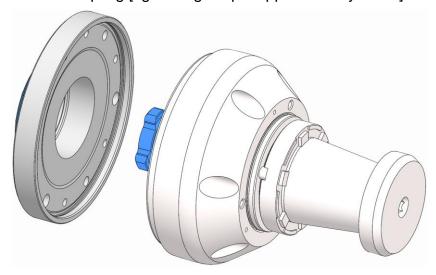

Fit the clamping device to the flange, aligning the hole patterns on the clamping device and the flange.








### **☆ INFORMATION**

To check that the clamping device is correctly positioned on the flange, it must be possible to draw a straight line between two bayonet lugs on the bayonet coupling. The opposing surface on the flange forms the second line.

These two lines must either be parallel or must form an angle pointing in a clockwise direction.

If the angle points clockwise, the position of the clamping device together with the ring adapter kit must be turned through one hole in the hole pattern on the clamping device.

5. Ensure that the relative positions of clamping device and flange are correct.

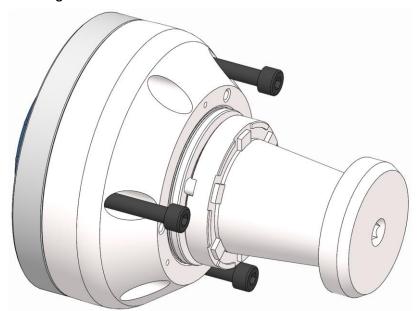

#### **₹** INFORMATION

The fixing screws on the clamping device are the shorter screws from the additional mandoteX fixing screws that are also needed.


6. Screw the fixing screws into the clamping device and tighten them to their specified tightening torque [see the »Screw tightening torques « chapter].




#### **INFORMATION**


The marking on the clamping device fixing screws is needed in order to distinguish between the fixing screws on the quick change-over adapter and the fixing screws on the clamping device when the product is being removed.

Mark the clamping device fixing screws

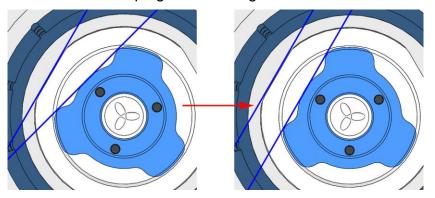

Untighten the bayonet coupling until the intended line between the bayonet lugs and the line on the surface of the flange are aligned.



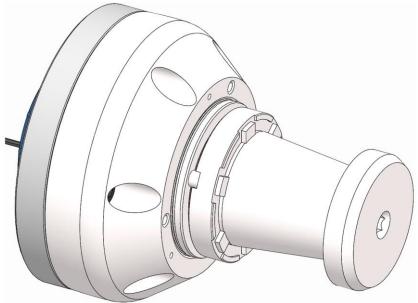


Screw in the clamping screws on the bayonet coupling and tighten to the specified tightening torque [see marking].



The tolerance of the set-up dimension is +0.25 mm of the nominal dimension.

10. Check the setting dimension. The actual dimension must be within the tolerance of the nominal set-up dimension.


# 8.3 Removal of the clamping device

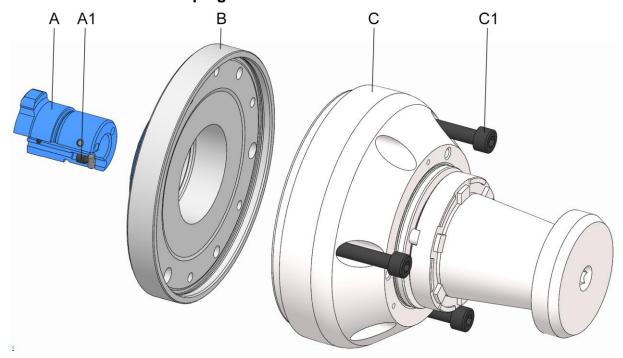


- A Bayonet coupling
- A1 Bayonet coupling clamping screws
- B Flange
- C Clamping device
- C1 Fixing screws clamping device




In addition to these operating instructions, also read and follow the operating instructions for the relevant clamping device.

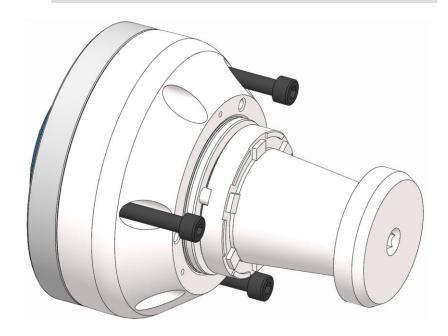


1. Unfasten and remove the fixing screws from the clamping device.

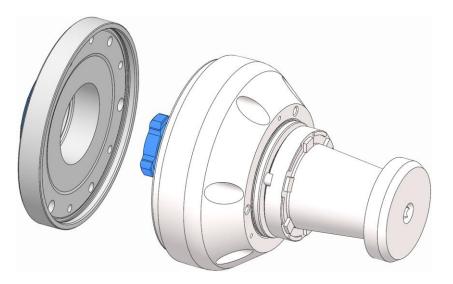


Dismount the clamping device from the flange.



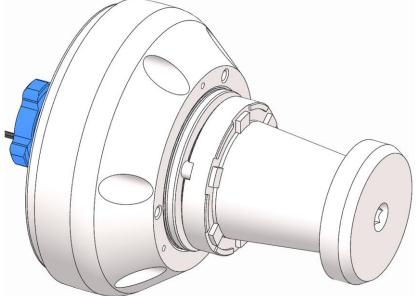

Unfasten the clamping screws in the bayonet coupling a few turns without removing them.

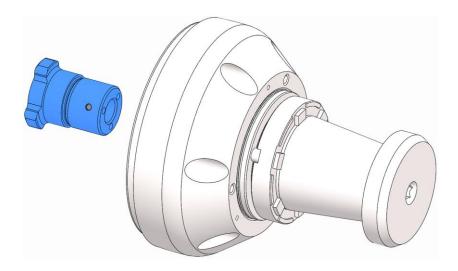

4. Unscrew and remove the bayonet coupling from the clamping device.

#### 8.4 Tests

#### NOTE

Serious damage to, or destruction of, the machine tool and the workpiece caused by damaged, incomplete or incorrectly installed products!

- Only install undamaged and complete products properly.
- If in doubt, contact the manufacturer.

Assure the following points before every installation and/or before every time the products are put into service:

- The products used are undamaged.
- All fixing screws are present on the products, and are tightened to the correct tightening torque.
- None of the edges and races are chipped or show any signs of wear.
- The speed set on the machine tool must not exceed the maximum speed of the product. Always take the lowest value of all maximum speeds for combined products indicated.
- Do not exceed the maximum actuating force indicated on the product.
   Always take the lowest value of all actuating forces indicated for combined products.
- All installation tools are removed from the machining area.

# Quick change-over system mandoteX Use

#### 8.5 Procedure after a collision

In the event of a collision, the product and its components must be checked for cracks and damage before being used again.

For this, remove the product from the machine [see »Removal of the product« chapter] and dismantle it [for level of disassembly, see »Cleaning« chapter].

# 9 Activities after end of production

- Switch off machine tool and secure it to prevent it from being switched back on.
- 2. Open the safety door / hood.



#### **WARNING**

Eye injuries and cuts caused by failure to wear protective clothing during cleaning operation!

- Never use compressed air to clean the product.
- Also wear the following items of personal protective equipment, in addition to the basic equipment:



- 3. Clean the product of swarf and production residue with a soft, lint-free cloth and apply a light coating of oil.
- Close the safety door / hood.

#### 10 Removal

If a break in production occurs that lasts for more than three days, the product must be removed and stored safely in accordance with the manufacturer's stipulations [see »Transport, packaging, storage « chapter].

#### 10.1 Safe removal



#### WARNING

Serious injuries caused by unskilled staff during installation / removal!

Installation and removal must be performed by skilled staff from the relevant specialist field.



#### WARNING

Serious injuries can be caused if the machine tool starts up accidentally!

- Set the machine tool into set-up mode.
- Remove all tools, auxiliary equipment and items of test equipment immediately from the working area of the machine.
- Remove all lifting gear from the product and from the working area of the machine.



#### **WARNING**

Serious injuries caused by the escape of media under high pressure!

- Shut down media delivery during installation and removal.
- Relieve any pressure trapped in the system.
- Shut down the system.



#### **WARNING**

Serious crushing injuries and breakages caused by falling parts during incorrect installation or removal!

- Ensure that the product cannot roll away or fall.
- If necessary, use an appropriate mounting aid for installation or removal on a vertically suspended machine spindle.



#### WARNING

Serious crushing injuries caused by improper machine movement during installation or removal!

- Machine movements are only permitted in set-up mode during installation and removal.
- Never reach into a gap.
- Pay attention to the gap dimensions of moving parts.



#### WARNING

Serious head injuries caused by bending into the working area of the machine!

- Only ever bend into the working area of the machine if there are no cutting tools or sharp objects in it, or if these are covered.
- Never move body parts under parts in the working area of the machine with the potential to drop down.
- Depending on weight, use an appropriate mounting aid for installation or installing on a vertically suspended machine spindle.



#### **WARNING**

High level of physical strain due to the weight of the product or of its components if not transported properly!

■ From a weight of 10 kg, use appropriate transport equipment, lifting gear and lifting tackle.




#### **INFORMATION**

If necessary, use any forcing / extraction threads in the components of the product, changing parts or clamping elements.

#### 10.2 Preparing the machine for removal

- Set the machine into set-up mode.
- 2. Reduce the operating pressure to a minimum.
- 3. Remove cutting tools and/or sharp objects from the working area of the machine, or cover them.
- Remove operating and auxiliary materials as well as remaining processing materials and dispose of them in an environmentally responsible manner.

#### 10.3 Removal of the product

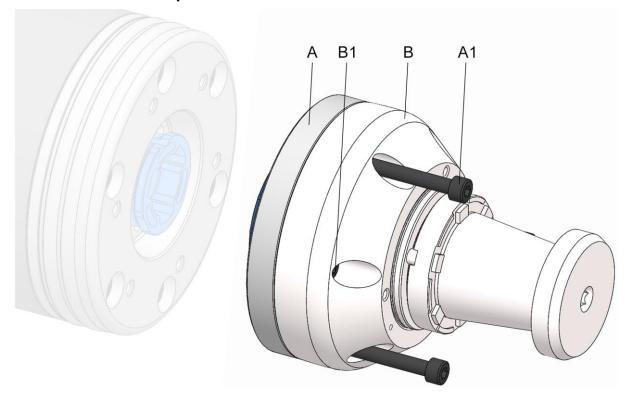

- A Quick change-over unit
- A1 Fixing screws on the quick change-over unit
- B Clamping device
- B1 Fixing screws clamping device
- 1. As described in the »Preparing the machine for removal« chapter, prepare for the following steps.

#### 10.3.1 Removal of the product from a machine adapter



#### **INFORMATION**

Installation / removal of the product is described in the operating instructions for the machine adapter.



In addition to these operating instructions, you should also read and follow the operating instructions for the associated machine adapter.

1. Remove the product.

## 11 Maintenance

#### 11.1 Maintenance safety



#### **WARNING**

Serious injuries caused by parts being ejected centrifugally after a loss of clamping power!

Maintain the maintenance and cleaning intervals of the product at all times.



#### CAUTION

Health risks caused by incorrect handling of cleaning agents!

Pay attention to hazard specifications and the safety data sheet of the manufacturer.



#### **INFORMATION**

If necessary, use any forcing / extraction threads in the components of the product, changing parts or clamping elements.

#### 11.2 Maintenance schedule

The following sections describe the maintenance work needed to ensure optimum and fault-free operation.

If increased levels of wear are detected during regular checks, shorten the maintenance intervals to reflect the actual rate at which signs of wear appear.

Contact the manufacturer for questions relating to maintenance work and maintenance intervals [see »Contact« chapter].


Interval	Maintenance work	
daily	Visual inspection of wearing points, nicks and cracks [see the »Visual inspection « chapter]	
	Visual inspection of the rubber on the CENTREX ring and on the locating taper for wearing points, nicks and cracks [see »Visual inspection« chapter]	
	Complete cleaning operation if heavily soiled [see the »Cleaning « chapter]	
weekly or after 40 operating hours	Remove the product [see the »Removal of the product« chapter]	
	Remove, clean and reinstall the CENTREX ring [see the »Cleaning« chapter]	
every six months or after 1500 operating hours*	Clean the complete product [see the »Cleaning« chapter]	
	Lubricate the product [see the »Lubricating the product« chapter]	

Interval	Maintenance work
for storage	See the »Storage« chapter
	* I have the same that any the desire at the same

depending upon which specification is achieved first

Table 5: Maintenance table

## 11.3 Cleaning

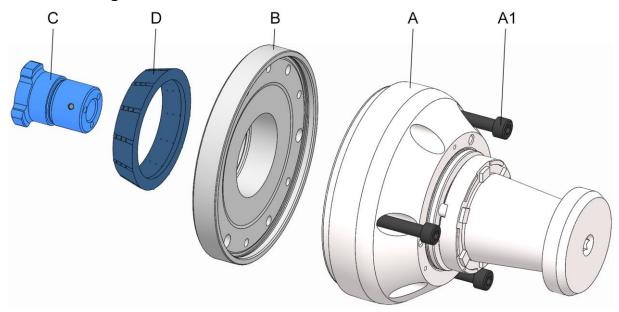

- Α Clamping device
- Fixing screws clamping device Α1
- Flange В
- С Bayonet coupling
- D **CENTREX** ring



#### WARNING

Eye injuries and cuts caused by failure to wear protective clothing during cleaning operation!

- Never use compressed air to clean the product.
- Also wear the following items of personal protective equipment, in addition to the basic equipment:



#### NOTE

#### Damage to seals caused by the wrong solvent!

- To clean the product, never use a solvent that attacks and damages the sealing elements installed. Those installed sealing elements can be made of NBR, Viton and PUR materials.
- To clean the product, never use a solvent that contains ester, nor a polar solvent.

#### NOTE

# Damage to materials caused by incorrect installation of sealing elements!

- Replace missing or damaged sealing elements.
- Ensure that the sealing elements do not fall out or get damaged during installation / removal, and apply a thin coat of grease if necessary.

Cleanliness of the relevant limit stop and guide diameter are essential for achieving axial and face run-out tolerances.

- Remove the product from the machine [see »Removal of the product « chapter].
- 2. Remove the clamping device from the product [see »Removal of clamping device « chapter].

#### **INFORMATION**

Cleaning of the clamping device is described in the operating instructions for the clamping device.



In addition to these operating instructions, also read and follow the operating instructions for the relevant clamping device.



#### WARNING

# Serious injuries caused by imbalance resulting from incorrect reassembly!

- The product components must be installed back in the same position.
- If necessary, mark out the relative positions of components prior to disassembly.

#### NOTE

# Damage to materials caused by incorrect Removal of the product!

- More extensive disassembly than shown on the exploded drawing is prohibited.
- Dismantle the product as shown on the exploded drawing.
- 4. Clean all oil and grease residues off all components with an ester-free, non-polar, soft, lint-free cloth and check for visible signs of damage.
- 5. Assemble the product in accordance with the exploded drawing and lubricate during assembly [see »Lubricating the product « chapter]. Pay attention to the following during assembly:
  - Replace worn or damaged fixing screws.
  - Tighten all fixing screws to the specified tightening torque [see nomenclature and/or »Screw tightening torques« chapter]. When tightening the screws, do so evenly to prevent any distortion under load.
  - Only apply lubricant to the mechanical mating surfaces. Pay attention to notes about lubricants [see »Use of lubricants « chapter].
  - Avoid too much lubricant on the locating face because this can cause face run-out errors.
  - Apply grease to the sealing elements [for example O-rings, rectangular rings] and sealing surfaces.
     Pay attention to notes about greases [see »Use of lubricants « chapter].
  - Before installing the CENTREX ring, apply a light coating of grease to its contact surface.
- Install the clamping device on the product [see »Installation of the clamping device « chapter].

53

#### 11.4 Visual inspection

Perform a daily visual inspection of the product to identify any damage to the product at an early stage.

Check the product for cracks and damage.

The rubber on the CENTREX ring also needs to be examined for cracks and signs of damage.

A check is also required to ensure that all fixing screws are tightened down.

If damage is detected, the relevant components must be exchanged immediately for genuine spare parts from the manufacturer.

Complete cleaning of the product is required if heavily soiled [see »Cleaning « chapter].

#### 11.5 Lubricating the product



#### **DANGER**

Serious injuries caused by workpiece being ejected centrifugally due to insufficient lubrication of the product!

- Maximum clamping force is reduced by approximately 20% if lubrication is insufficient.
- Always comply with the maintenance intervals [see »Maintenance schedule« chapter].

Lubrication takes place every time the system is cleaned, maintained or assembled, and also when required.

- Dismantle the product for lubrication purposes. Consult the »Cleaning« chapter for details of the level of disassembly required.
- At all lubrication points, remove escaping, consumed or surplus grease, and dispose of it in accordance with locally enforceable legislative provisions.

#### 11.6 Use of lubricants

To achieve ultimate performance from the products, use the specified lubricants.

Only use grease that complies with the fundamental requirements governing adhesion, pressure resistance and solubility in coolants. Furthermore, there must be no particles of dirt in the grease because these cause an operational malfunction if they come between two interference fit surfaces. For this, the following lubricants are recommended:

#### GP 355 universal grease

[see the HAINBUCH product catalogue]

#### Alternatively:

Lubricants	Manufacturer	Product designa- tion
Grease	MicroGleit	GP 355
	Klüber	QNB 50
	Zeller & Gmelin	DIVINOL SD24440
	Bremer & Leguill	RIVOLTA W.A.P.

Table 6: Selection of lubricants

#### NOTE

Malfunction of the product due to a combination of different greases!

- Never mix different greases with one another.
- Clean the product completely before using a different grease.

# 12 Disposal

If no agreement exists for return or disposal, send dismantled components off for recycling.

#### NOTE

Substantial damage to the environment can result from incorrect disposal of environmentally hazardous substances!

Lubricants, auxiliary materials and operating fluids are governed by legislation for the processing of special-category waste: All disposal to be performed by authorized waste disposal specialists.

Catch exchanged oils and greases in suitable containers and dispose of them in accordance with applicable local provisions.

The local municipal authority or specialist waste disposal companies can provide information about environmentally compliant disposal.

## 13 Faults

The following chapter describes possible causes for faults, and the work involved in remedial action.

If multiple faults occur, shorten the maintenance intervals in accordance with actual load levels.

Contact the manufacturer if faults occur that cannot be remedied by following these instructions [see »Contact« chap-

#### 13.1 Procedure with faults

This applies in all cases:

- With faults that constitute an immediate danger to people or capital equipment, press the Emergency Stop button on the machine tool immediately.
- 2. Establish the cause of the fault.
- 3. If troubleshooting requires work to be conducted in the danger area, switch the machine tool into set-up mode.
- Notify the person on location of the fault immediately.
- 5. Depending on the type of fault, get it remedied by authorized and appropriately skilled specialists.

#### **INFORMATION**

The troubleshooting table in the following section provides information about who is authorized to remedy a given fault.

6. In the event of a fault not caused by the product, the fault may be caused by something close to the machine tool. For this, refer to the operating instructions of the machine tool.

#### 13.2 Fault table

Fault	Possible cause	Remedial action	Remedied by	
Incorrect axial strokes in the quick change-over system	Dirt in the parts in the power flow	Remove and clean the quick change-over unit / quick change- over adapter. If necessary, re- move, disassemble and clean the machine adapter	Skilled specialist	
	The set-up dimension was not maintained	Check the set-up dimension and correct if necessary	Skilled specialist	
Clamping force is too weak	Axial actuating force is too weak	See fault table on machine adapter [see the operating instructions for the machine adapter]	Skilled specialist	
Clamping force is too high	Axial actuating force is too high	See fault table on machine adapter [see the operating instructions for the machine adapter]	Skilled specialist	
Geometry deviation on the workpiece	Concentricity error on the clamping device	Check axial run-out of the quick change-over system and the clamping device and correct if necessary	_Skilled special- ist	
	Face run-out error of the clamping device	Check top run-out on the quick change-over system and the clamping device and, if required, clean their mating surfaces		
It is no longer possible to install the quick change-over unit / quick change-over adapter	Defective axial strokes in the quick change-over sys- tem	See fault »Incorrect axial strokes in the quick change-over system«		

Table 7: Fault table

#### 13.3 Commissioning after a fault has been remedied

After the fault has been remedied, perform the following steps to recommission it:

- 1. Reset the emergency stop equipment.
- Acknowledge the fault on the control unit of the machine tool.
- 3. Ensure that no-one is in the danger area.
- 4. Start the machine tool.

## 14 Annex

#### 14.1 Contact

The following hotlines are available to you for orders, schedule tracking and emergencies.

#### **Order hotline**

Ordered quickly, supplied swiftly. Just phone:

+49 7144. 907-333

#### **Tracking hotline**

Current status of your order? Just call:

+49 7144. 907-222

#### 24 hour emergency phone line

Has a system crash occurred, or some other technical emergency?

Our experts are there for you around the clock:

+49 7144. 907-444

For advice or help, you can contact the sales partners and service staff listed in www.hainbuch.com.

#### 14.2 Manufacturer certification

Manufacturer certification is supplied with the product and with this manual.

# Quick change-over system mandoteX Annex

# Quick change-over system mandoteX Annex

# **Index directory**

Accessories needed mandoteX fixing screws 22 Performance values 21 Accessories, needed Clamping devices 22 Hydraulics specialist 12 Belancing quality 21 Skilled specialist 11 Skilled specialist 12 Brief description 22 Trainees 11 Arabeta 15 Protective equipment 16 Protective equipment 17 Protective equipment 17 Protective equipment 17 Protective equipment 18 Protective goggles 19 Protective go	A	Р	
Accessories, needed         Personnel requirements         1           Clamping devices         22         Electricians         12           B         Pneumatics specialist         12           Balancing quality         21         Skilled specialist         12           Brief description         22         Trainees         12           C         Preservation         22           Cleaning         51         Protective equipment           Copyright         8         Hair net         15           Definition of terms         7         Protective equipment         16           Lopyright         8         Hair net         15           Definition of terms         7         Protective equipment         16           Lopyright         8         Hair net         15           Protective gloves         15         15           Eled of production         46         Safety footwear         15           End of production         46         Removal         15           Fault table         58         Removal         15           Fault table         58         Removal         42           Hazards         15         Safety         Safety	Accessories needed	Packaging	26
Clamping devices         22         Electricians         12           Machine adapter         22         Hydraulics specialist         12           Balancing quality         21         Skilled specialist         11           Balancing quality         21         Skilled specialist         11           Brief description         22         Trainees         12           C         Preservation         27           Cleaning         51         Protective equipment           Copyright         8         Hair net         14           Definition of terms         7         Protective equipment           Lopyright         8         Hair net         15           Definition of terms         7         Protective equipment         16           Lopyright         8         Hair net         11           B         Hard hat         15           B         Protective equipment         16           Lopyright         8         Hair net         11           B         Hard hat         18           B         Protective equipment         18           Lend of production         46         Safety           Fend of production         46	mandoteX fixing screws22	Performance values	20
Machine adapter.         22         Hydraulics specialist         12           B         Pneumatics specialist         13           Balancing quality         21         Skilled specialist         11           Brief description         22         Trainees         12           C         Preservation         22           Cleaning         51         Protective equipment           Copyright         8         Hair net         15           Definition of terms         7         Protective equipment         15           Definition of terms         7         Protective gloyes         15           End of production         46         Safety footwear         15           End of production         46         Safety footwear         15           Fault table         58         Removal           Fault table         58         Removal           Faults         57         Clamping device         44           Fault table         58         Removal           Faults         57         Clamping device         44           Freparation of the machine         31         Maintenance         56           Installation         10         Removal         44	Accessories, needed	Personnel requirements	11
Balancing quality         21         Skilled specialist         12           Brief description         22         Trainees         12           C         Preservation         27           Cleaning         51         Protective equipment           Copyright         8         Hair net         15           Definition of terms         7         Protective equipment         15           Definition of terms         7         Protective equipment         15           Definition of terms         7         Protective equipment         15           Definition of terms         7         Protective gloves         15           E         Protective goggles         15           End of production         46         Safety footwear         15           End of production         46         Safety footwear         15           F         R         Removal           Faults         57         Clamping device         42           Faults table         58         Removal           Faults         57         Clamping device         42           Freparation of the machine         31         Maintenance         56           Installation         32         Remo	Clamping devices22	Electricians	12
Balancing quality         21         Skilled specialist         12           Brief description         22         Trainees         12           C         Preservation         27           Cleaning         51         Protective equipment           Copyright         8         Hair net         15           Definition of terms         7         Protective equipment         15           Definition of terms         7         Protective equipment         15           Definition of terms         7         Protective equipment         15           Definition of terms         7         Protective gloves         15           E         Protective goggles         15           End of production         46         Safety footwear         15           End of production         46         Safety footwear         15           F         R         Removal           Faults         57         Clamping device         42           Faults table         58         Removal           Faults         57         Clamping device         42           Freparation of the machine         31         Maintenance         56           Installation         32         Remo	Machine adapter22	Hydraulics specialist	12
Balancing quality         21         Skilled specialist         1           Brief description         22         Trainees         12           C         Preservation         27           Cleaning         51         Protective equipment           Copyright         8         Hair net         18           D         Hard hat         15           Definition of terms         7         Protective gloves         15           End of production         46         Safety footwear         15           End of production         46         Safety footwear         15           Environmental protection         19         Workplace clothing         14           F         R         Removal           Faults         57         Clamping device         42           Faults         57         Clamping device         42           Preparation of the machine         31         Product         48           I         Safety         Safety           Installation         Safety         General         10           Product         32         Removal         42           Installation safety         28         Use         32	В		
Brief description         22         Trainees         12           C         Preservation         23           Cleaning         51         Protective equipment           Copyright         8         Hair net         15           D         Hard hat         15           Definition of terms         7         Protective gloves         16           End of production         46         Safety footwear         15           End of production         19         Workplace clothing         14           F         R         Removal           Faults table         58         Removal           Faults         57         Clamping device         42           H         Preparation of the machine         44           Hazards         15         Product         48           Installation         Safety         General         10           Clamping device         37         Removal         44           Preparation of the machine         31         Maintenance         50           Product         32         Removal         44           Product         32         Removal         44           Product         32         <	Balancing quality21		
C         Preservation         27           Cleaning         51         Protective equipment           Copyright         8         Hair net         15           D         Hair net         15           Definition of terms         7         Protective equipment           E         Protective gloves         15           End of production         46         Safety footwear         15           Environmental protection         19         Workplace clothing         14           F         R         Removal           Faults         58         Removal           Faults         57         Removal         42           H         Preparation of the machine         42           H         Preparation of the machine         45           Installation         Safety         General         10           Preparation of the product         32         Removal         44           Product         32         Removal         45           Product         32         Removal         46           Product         32         Removal         46           Product         32         Removal         46           Pro			
Copyright         8         Hair net         15           D         Hard hat         15           Definition of terms         7         Protective gloves         15           E         Protective goggles         15           End of production         46         Safety footwear         15           Environmental protection         19         Workplace clothing         14           F         R         R         Fault table         58         Removal           Faults         57         Clamping device         42         Preparation of the machine         44         Product         42         Preparation of the machine         45         Product         45         Safety	_	Preservation	27
Copyright         8         Hair net         15           D         Hard hat         15           Definition of terms         7         Protective gloves         15           E         Protective goggles         15           End of production         46         Safety footwear         15           Environmental protection         19         Workplace clothing         14           F         R         R         Fault table         58         Removal           Faults         57         Clamping device         42         Preparation of the machine         44         Product         42         Preparation of the machine         45         Product         45         Safety	Cleaning51	Protective equipment	
Definition of terms	_	• •	15
Definition of terms         7         Protective gloves         15           End of production         46         Safety footwear         15           Environmental protection         19         Workplace clothing         12           F         R         Removal           Faults         57         Clamping device         42           Faults         57         Clamping device         42           H         Preparation of the machine         44           Hazards         15         Product         45           Installation         Safety         Safety           Clamping device         37         General         16           Preparation of the machine         31         Maintenance         56           Preparation of the product         32         Removal         47           Product         32         Transport, packaging, storage         24           Product         32         Transport, packaging, storage         24           Intended use         12         Scope of delivery         8           Key to symbols         6         Aluminum components         37           Layout         22         Spare parts         9           Liabili	D	Hard hat	15
E         Protective goggles         15           End of production         46         Safety footwear         15           Environmental protection         19         Workplace clothing         14           F         R         Removal           Fault table         58         Removal           Faults         57         Clamping device         42           H         Preparation of the machine         48           Hazards         15         Product         48           Installation         Safety         Safety           Clamping device         37         General         10           Preparation of the machine         31         Maintenance         50           Preparation of the product         32         Removal         47           Product         32         Removal         47           Product         32         Transport, packaging, storage         24           Installation safety         28         Use         36           Intended use         12         Scope of delivery         8           K         Screw tightening torques         4           Key to symbols         6         Aluminum components         3      <	Definition of terms7		
End of production         46         Safety footwear         15           Environmental protection         19         Workplace clothing         14           F         R         Removal         14           Faults         57         Clamping device         42           H         Preparation of the machine         48           Hazards         15         Preparation of the machine         48           Installation         Safety         General         10           Clamping device         37         General         10           Preparation of the machine         31         Maintenance         50           Product         32         Removal         47           Product         32         Removal         47           Product         32         Removal         47           Product         32         Transport, packaging, storage         24           Use         36         Installation safety         28           Use         36         Installation safety         28           K         Scope of delivery         8           Key to symbols         6         Aluminum components         37           Layout         22	E		
Environmental protection         19         Workplace clothing         14           F         R         R           Fault table         58         Removal           Faults         57         Clamping device         42           H         Preparation of the machine         48           Hazards         15         Preparation of the machine         48           Installation         Safety         Safety           Clamping device         37         General         10           Preparation of the machine         31         Maintenance         50           Preparation of the product         32         Removal         10           Preparation of the product         32         Removal         10           Product         32         Removal         10           Product         32         Removal         10           Product         32         Removal         10           Product         32         Removal         12           Installation         32         Removal         12           Installation         32         Removal         12           Installation         32         Removal         13	End of production46		
F         R           Fault table         58         Removal           Faults         57         Clamping device         42           H         Preparation of the machine         48           Hazards         15         Product         49           I         S           Installation         Safety           Clamping device         37         General         10           Preparation of the machine         31         Maintenance         50           Preparation of the product         32         Removal         47           Preparation of the product         32         Removal         47           Product         32         Removal         47           Product         32         Transport, packaging, storage         24           Use         36         Use         36           Installation safety         28         Use         36           Intended use         12         Scope of delivery         8           Key to symbols         6         Aluminum components         37           Key to symbols         6         Aluminum components         37           Lajout         22         Spare parts         5 </td <td>•</td> <td></td> <td></td>	•		
Faults         57         Clamping device         42           H         Preparation of the machine         48           Hazards         15         Product         49           I         S           Installation         Safety           Clamping device         37         General         10           Preparation of the machine         31         Maintenance         56           Preparation of the product         32         Removal         47           Product         32         Transport, packaging, storage         24           Installation safety         28         Use         36           Intended use         12         Scope of delivery         8           K         Screw tightening torques         8           Key to symbols         6         Aluminum components         37           L         Metric control threads         31           Layout         22         Spare parts         52           Liability         8         Speed         22           Limits of use         23         Storage         25           Lubricants         19, 55         Symbols on the packaging         25           M         T	_		
Faults         57         Clamping device         42           H         Preparation of the machine         48           Hazards         15         Product         49           I         S           Installation         Safety           Clamping device         37         General         10           Preparation of the machine         31         Maintenance         56           Preparation of the product         32         Removal         47           Product         32         Transport, packaging, storage         24           Installation safety         28         Use         36           Intended use         12         Scope of delivery         8           K         Screw tightening torques         8           Key to symbols         6         Aluminum components         37           L         Metric control threads         31           Layout         22         Spare parts         52           Liability         8         Speed         22           Limits of use         23         Storage         25           Lubricants         19, 55         Symbols on the packaging         25           M         T	Fault table58	Removal	
H         Preparation of the machine         48           I         S           Installation         Safety           Clamping device         37         General         10           Preparation of the machine         31         Maintenance         56           Preparation of the product         32         Removal         47           Product         32         Transport, packaging, storage         22           Installation safety         28         Use         36           Intended use         12         Scope of delivery         8           K         Screw tightening torques           Key to symbols         6         Aluminum components         37           L         Metric control threads         37           Laayout         22         Spare parts         9           Liability         8         Speed         22           Limits of use         23         Storage         25           Lubricants         19, 55         Symbols on the packaging         25           M         T         Technical data         20           Misuse         13         Tests         44           O         Transport inspection <t< td=""><td></td><td>Clamping device</td><td>42</td></t<>		Clamping device	42
Hazards			
S   Installation	Hazards15		
Clamping device       37       General       10         Preparation of the machine       31       Maintenance       50         Preparation of the product       32       Removal       47         Product       32       Transport, packaging, storage       22         Installation safety       28       Use       36         Intended use       12       Scope of delivery       8         Key to symbols       6       Aluminum components       37         Layout       22       Spare parts       9         Layout       22       Spare parts       9         Liability       8       Speed       27         Limits of use       23       Storage       27         Lubricants       19, 55       Symbols on the packaging       25         M       T         Maintenance schedule       50       Technical data       20         Misuse       13       Tests       44         O       Transport inspection       25         Operating conditions       21       Transportation, internal       26	I		
Clamping device       37       General       10         Preparation of the machine       31       Maintenance       50         Preparation of the product       32       Removal       47         Product       32       Transport, packaging, storage       22         Installation safety       28       Use       36         Intended use       12       Scope of delivery       8         Key to symbols       6       Aluminum components       37         Layout       22       Spare parts       9         Layout       22       Spare parts       9         Liability       8       Speed       27         Limits of use       23       Storage       27         Lubricants       19, 55       Symbols on the packaging       25         M       T         Maintenance schedule       50       Technical data       20         Misuse       13       Tests       44         O       Transport inspection       25         Operating conditions       21       Transportation, internal       26	Installation		
Preparation of the machine 31 Maintenance 56 Preparation of the product 32 Removal 47 Product 32 Transport, packaging, storage 24 Installation safety 28 Use 36 Intended use 12 Scope of delivery 8 Key to symbols 6 Aluminum components 37 L Metric control threads 37 Layout 22 Spare parts 9 Liability 8 Speed 27 Limits of use 23 Storage 27 Lubricants 19, 55 Symbols on the packaging 25 M T Maintenance schedule 50 Technical data 26 Misuse 13 Tests 44 O Transport inspection 25 Operating conditions 21 Transportation, internal 26		•	10
Preparation of the product         32         Removal         47           Product         32         Transport, packaging, storage         24           Installation safety         28         Use         36           Intended use         12         Scope of delivery         8           K         Screw tightening torques         8           Key to symbols         6         Aluminum components         37           Layout         22         Spare parts         32           Liability         8         Speed         27           Limits of use         23         Storage         27           Lubricants         19, 55         Symbols on the packaging         25           M         T           Maintenance schedule         50         Technical data         20           Misuse         13         Tests         42           O         Transport inspection         25           Operating conditions         21         Transportation, internal         26			
Product         32         Transport, packaging, storage         24           Installation safety         28         Use         36           Intended use         12         Scope of delivery         8           K         Screw tightening torques           Key to symbols         6         Aluminum components         37           L         Metric control threads         37           Layout         22         Spare parts         9           Liability         8         Speed         27           Limits of use         23         Storage         27           Lubricants         19, 55         Symbols on the packaging         25           M         T           Maintenance schedule         50         Technical data         20           Misuse         13         Tests         4           O         Transport inspection         25           Operating conditions         21         Transportation, internal         26			
Installation safety         28         Use         36           Intended use         12         Scope of delivery         8           K         Screw tightening torques           Key to symbols         6         Aluminum components         37           Layout         22         Spare parts         9           Liability         8         Speed         27           Limits of use         23         Storage         27           Lubricants         19, 55         Symbols on the packaging         25           M         T           Maintenance schedule         50         Technical data         20           Misuse         13         Tests         44           O         Transport inspection         25           Operating conditions         21         Transportation, internal         26			
Intended use			
KScrew tightening torquesKey to symbols6Aluminum components37LMetric control threads37Layout22Spare parts9Liability8Speed27Limits of use23Storage27Lubricants19, 55Symbols on the packaging25MTMaintenance schedule50Technical data20Misuse13Tests44OTransport inspection25Operating conditions21Transportation, internal26	•		
Key to symbols6Aluminum components36LMetric control threads36Layout22Spare parts9Liability8Speed26Limits of use23Storage27Lubricants19, 55Symbols on the packaging26MTTMaintenance schedule50Technical data20Misuse13Tests44OTransport inspection25Operating conditions21Transportation, internal26		-	
L       Metric control threads       36         Layout       22       Spare parts       9         Liability       8       Speed       27         Limits of use       23       Storage       27         Lubricants       19, 55       Symbols on the packaging       25         M       T         Maintenance schedule       50       Technical data       20         Misuse       13       Tests       44         O       Transport inspection       25         Operating conditions       21       Transportation, internal       26			31
Layout       22       Spare parts       9         Liability       8       Speed       27         Limits of use       23       Storage       27         Lubricants       19, 55       Symbols on the packaging       25         M       T         Maintenance schedule       50       Technical data       20         Misuse       13       Tests       44         O       Transport inspection       25         Operating conditions       21       Transportation, internal       26		•	
Liability       8       Speed       26         Limits of use       23       Storage       27         Lubricants       19, 55       Symbols on the packaging       25         M       T         Maintenance schedule       50       Technical data       20         Misuse       13       Tests       44         O       Transport inspection       25         Operating conditions       21       Transportation, internal       26	Lavout22		
Limits of use       23       Storage       27         Lubricants       19, 55       Symbols on the packaging       28         M       T         Maintenance schedule       50       Technical data       20         Misuse       13       Tests       44         O       Transport inspection       28         Operating conditions       21       Transportation, internal       26		•	
Lubricants	•		
MTMaintenance schedule50Technical data20Misuse13Tests42OTransport inspection25Operating conditions21Transportation, internal26		•	
Misuse			
Operating conditions 21 Transport inspection 25 Transportation, internal 26	Maintenance schedule50	Technical data	20
Operating conditions 21 Transport inspection 25 Transportation, internal 26			
Operating conditions			
	Operating conditions21		
Type designation2		•	

# Quick change-over system mandoteX

U		W	
Unpacking	26	Warranty	9
ا ادم	23		



#### HAINBUCH GMBH · SPANNENDE TECHNIK